



N-Type HJT Module

620-640W

Max. Power Output

0~+3%


Power Tolerance

23.69%

Module Efficiency

HJT Half-cut Bifacial Dual-Glass Module(MBB)

Module type: SKC611HDGDC

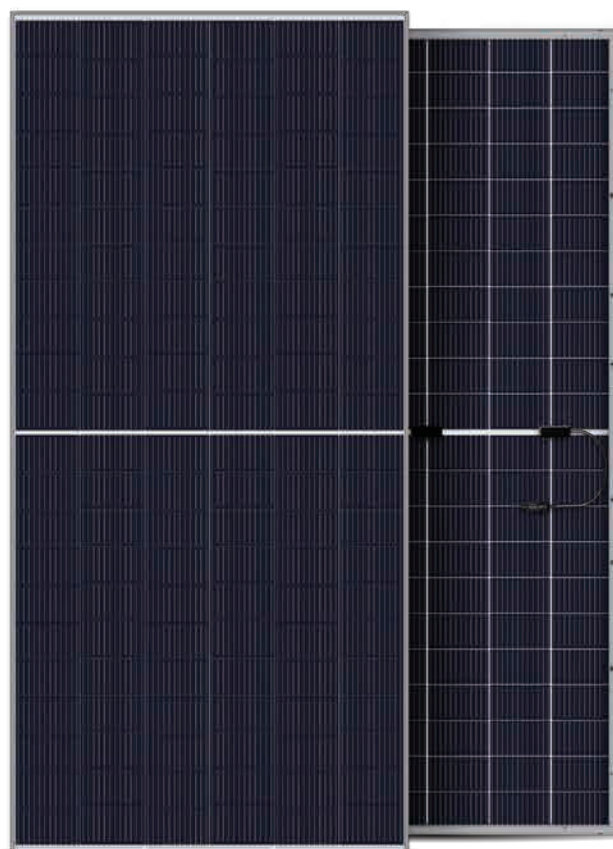

Product advantages



N-type HJT technology for lower LCOE

The lower temperature coefficient and better low irradiance performance of HJT technology can effectively reduce LCOE.




Fire class A, harsh environment adaptability

The module adopt a double glass structure, which can adapt to all kinds of harsh environment, and the fire rating can reach Class A.



30-year power warranty

The average life of dual-glass module is 30 years, 5 years longer than that of single-glass modules.




Double-sided power generation, higher income

The dual-glass module has a bifaciality of up to 90% and a power generation gain of 7%-30% on the back side.

LINEAR PERFORMANCE WARRANTY

15 Years product warranty on materials and workmanship

30 Years linear power output warranty

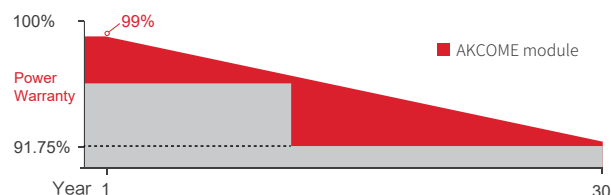

30 years decay $\leq 0.25\%$ annually on average

Xiamen Xiangyu New Energy Co., Ltd provides the limited warranty to purchasers of AKCOME PV modules which produced by Xiangyu.

CERTIFICATES

ISO 9001: 2015
Quality Management System

IEC 61215 / IEC 61730

ISO 14001: 2015
Environmental Management System

ISO 45001: 2018
Safety Management System

*Certification requirements vary in different markets, please consult with Akcome Optonics sales team for appropriate certification.



LLOYD'S



ELECTRICAL PARAMETERS @ STC

Max. Power Output Pmax (W)	620	625	630	635	640
Power Tolerance	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%
Max. Power Voltage Vmp (V)	41.05	41.14	41.23	41.32	41.41
Max. Power Current Imp (A)	15.12	15.12	15.30	15.39	15.47
Open Circuit Voltage Voc (V)	49.15	49.15	49.34	49.43	49.52
Short Circuit Current Isc (A)	15.96	15.96	16.16	16.26	16.36
Module Efficiency(%)	22.95	23.14	23.32	23.51	23.69

*STC (Standard Test Condition): Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

*Measurement Tolerance (±3.0%)

ELECTRICAL PARAMETERS @ BNPI

Max. Power Output Pmax (W)	695	700	706	712	717
Max. Power Voltage Vmp (V)	41.19	41.28	41.37	41.46	41.55
Max. Power Current Imp (A)	16.88	16.98	17.08	17.18	17.27
Open Circuit Voltage Voc (V)	49.32	49.42	49.51	49.60	49.69
Short Circuit Current Isc (A)	17.90	18.01	18.12	18.24	18.35

*BNPI (Bifacial Nameplate Irradiance): Front Side Irradiance 1000W/m², Rear Side Irradiance 135W/m², Cell Temperature 25°C, Air Mass 1.5

*Measurement Tolerance (±3.0%)



MECHANICAL PARAMETERS

Cell Type	HJT 182x105mm
Number of Cells	132pcs(6x22)
Dimensions(L*W*H)	2382x1134x30mm
Weight	33.4kg
Frame	Frameless
Junction Box	IP68, 3 bypass diodes
Cable,Length	4.0mm ² , 300mm


TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.24%/°C
Temperature Coefficients of Voc	-0.22%/°C
Temperature Coefficients of Isc	+0.040%/°C

I-V CURVES

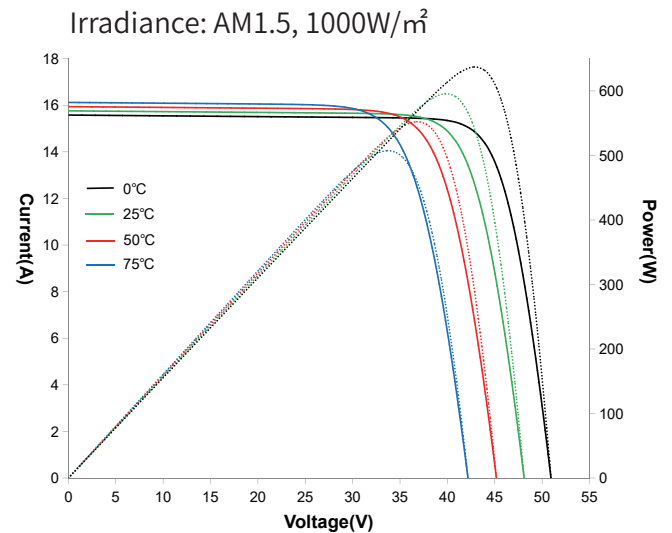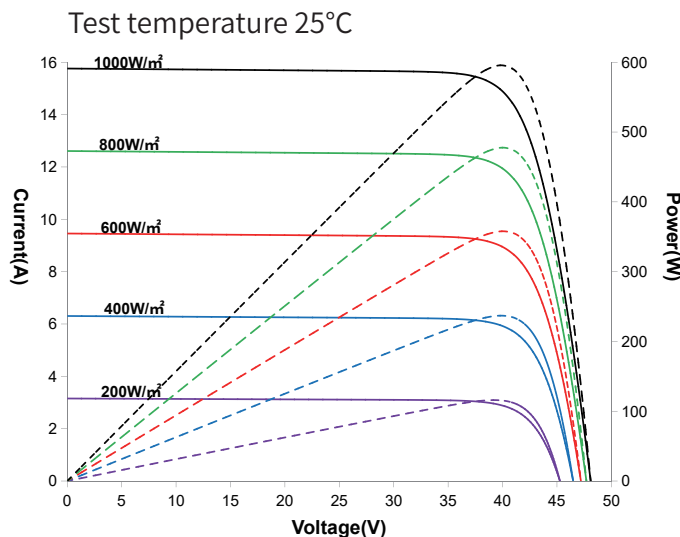

ASSEMBLY DRAWING (Unit:mm)

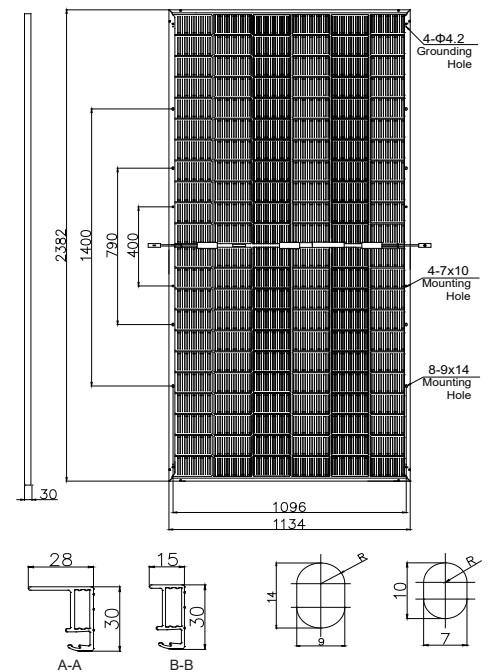

OPERATING CONDITION

Maximum System Voltage(V)	1500(DC)
Operating Temperature(°C)	-40~+85
Max.Wind Load /Snow Load(Pa)	2400/5400
Max.Series Fuse Rating(A)	35
Fire Rating	Class A
Bifaciality	90±5%
NOCT	44°C

PACKAGE INFORMATION

Container 40'HQ	720pcs
Quantity / Pallet	36pcs
Size: 2396×1120×1254mm; Net weight:1202.4kg; Gross weight: 1258.4kg	