


Corrugated Sheet Roof Mounting System-CG

AL6005-T5, 10 micron anodized | Easy installation, fast & efficient

Water-proof EPDM provided | Applicable for wave rooftops (fiber cement, wave-type tin sheds)

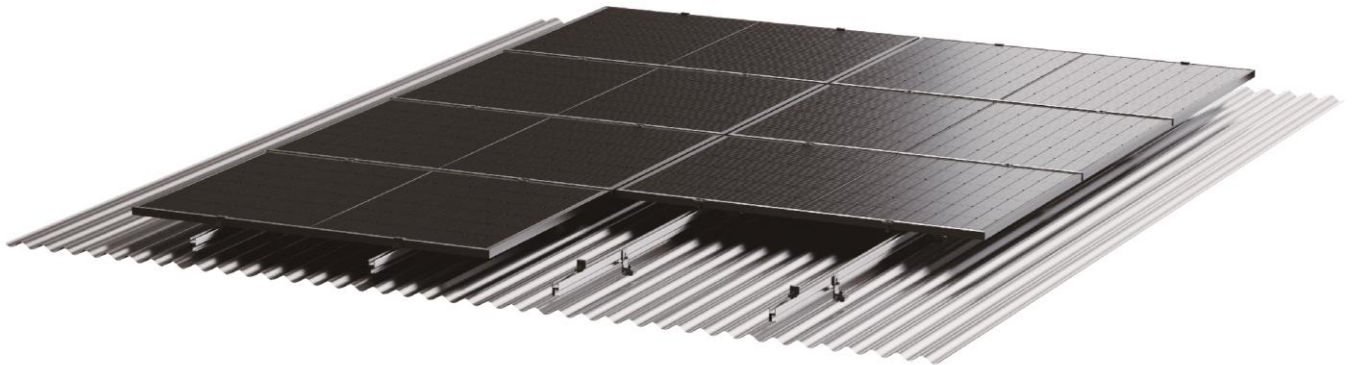

Specifications

Wind Load: 45 m/s

Snow Load: 1.4KN/m

Tilt Angle: Parallel to the roof angle

Corrosivity Category: C1~C4



GM-EC-35-D




GM-MC-35-D



GM-MRH-38-01



GM-MRH-38-02



GM-R02-Light



GM-RS-01-L-D