




BIPV

GM SolidBIPV

Equipped with drainage tray to avoid water leakage effectively | Matched with multiple auxiliary materials
Strong resistance to snow and wind | Water-proof rails can be installed easily and increase the structure strength
Good translucency, it can effectively improve the brightness of indoor with beautiful appearance

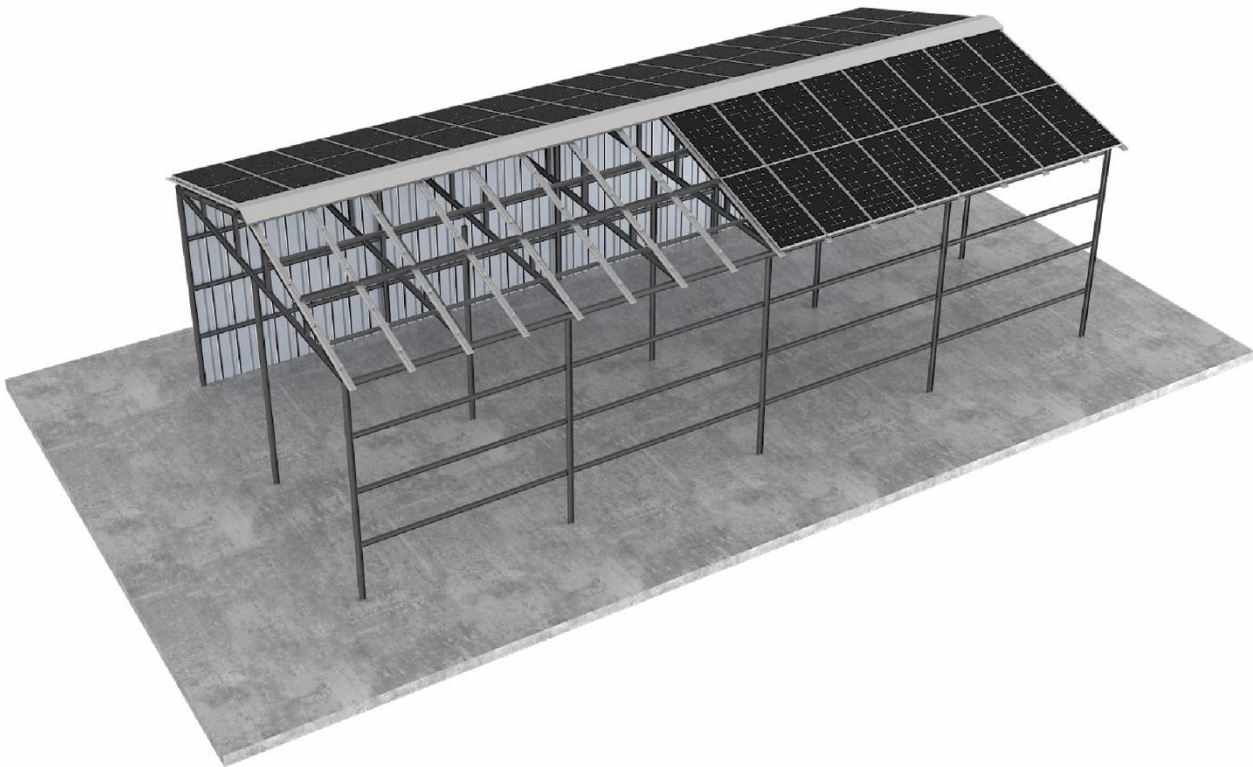

Specifications

Tilt Angle: 0°-30° Wind Load: 45m/s Snow Load: 2.4KN/m² Material: AL6005-T5/Q355

Zn-Al-Mg Waterproofing Solution



GM-XLM-GC-SC-B
C Type



GM-XLM-M1
M Type



GM-XLM-GC-ZC



GM-BAPV-GC



GM-XLM-MC-35-01



GM-XLM-SC-01



GM-XLM-EC-35-01

Aluminum Waterproofing Solution



GM-MC-40-FX-01-D



GM-EC-40-FX-D



GM-R71-G



GM-BR-01-LM-D



GM-FS-SC