

Mini Rail-MR



Specifications




Material:AL6005-T5/SUS304

Max.Wind Load:45 m/s

Tilt Angle:Parallel to the roof angle

Max.Snow Load:1.4KN/m

Corrosivity Category:C1~C4

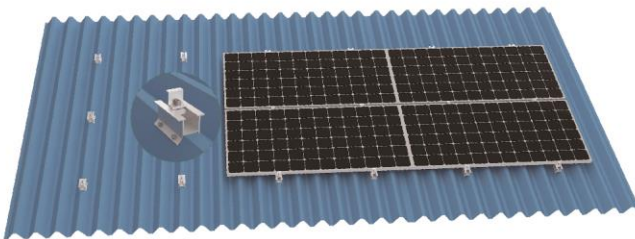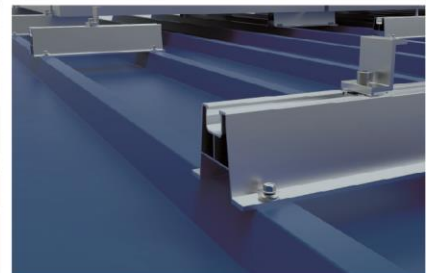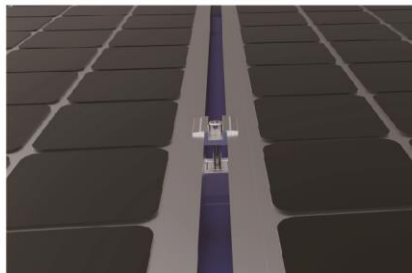

Standard:GB50797-2012 | AS NZS1170.2-2021 | EN1991 | JISC8955 | ASCE 7

Module Size: Suitable for all panel sizes

Cost Advantages: Rail-less design with cost efficiency

Stable and Durable: Ensures high strength and corrosion resistance of the material, greatly improving the service life

